

# BP10 2-5 CHARGING STATION RACK

The BP10 2-5 Charging rack is designed for the Global market with multiple input voltage configurations.

The "BP" series of distribution rack is designed to provide a compact shelving system to accommodate PBSC Chargers (PBS01-002019-03) and 36 volt LI-ION Batteries (PBS01-02029-02).

This model is portable and allows you to charge up to 10 batteries, each battery is charged by a single PBSC charger mounted in the rear of the unit, all LED charge conditions are indicated on the front panel. The batteries to be charged are inserted into the front portal.

This design is stackable with optional fan and clamping devices.

**Input Option 1:** Dual 120VAC, 10.4A 50-60Hz, corded 6ft, (2M) input cables with N5-15P plugs. (Requires 2 120VAC 15 A circuits, min.) **North American Market only.**

**Input Option 2:** Single 208-240VAC 12.5A-10.4A 50-60Hz, corded 6ft. (2M) input cord with L14-20P plug. (Matching L14-20C connectors and/or L14-20R receptacles available). (Requires a 208-240VAC circuit, 15A min.) **North American Market only.**




**Input Option 3:** Single 220VAC, 11.3A 50-60Hz, corded 6ft. (2M) input cord with BC1363/A plug with 13A fuse. Illuminated DPST on/off switch. **UKCA, CE Market only.**

Dimensions: 18.72" (476mm) Width  
11.1" (282mm) Height  
29.71" (755mm) Depth

Weight: 40Lbs (16 Kg) Empty

For indoor use only in a well ventilated work area. Consult your local requirements for the proper and safe ventilation and charging of LI-ION batteries.

CSAUS Certification pending. UKCA, CE Approved. ESA field Certification available.

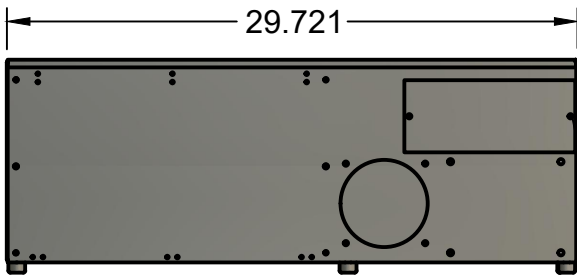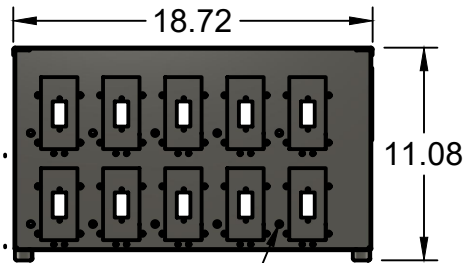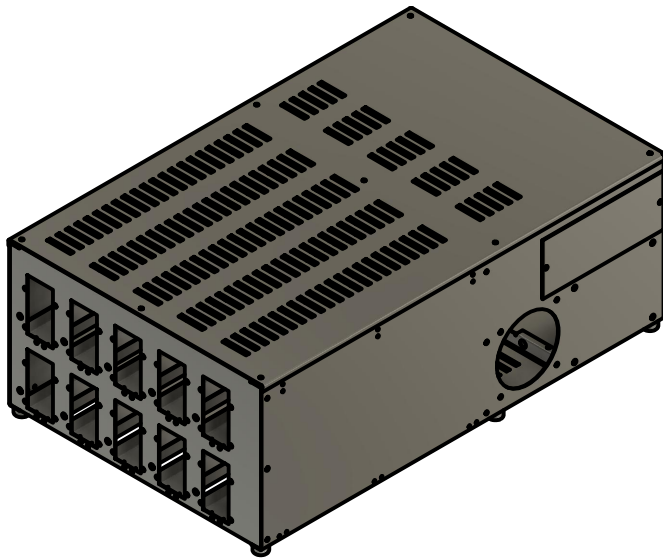

205B Konrad Crescent, Markham, Ontario L3R8T9  
P 905-513-1550, vei@chargers.ca, www.chargers.ca



PROJECT

3.1 BP PBSC CHARGER RACKS

TITLE

BP10 2-5  
Global Voltages Available

100-240VAC 50-60Hz

APPROVED	SIZE	CODE	DWG NO	REV
CHECKED	A			
DRAWN Simon Plant 2021-12-06	SCALE 1:10	WEIGHT	SHEET 1/1	