


BP6 2-3 CHARGING STATION RACK

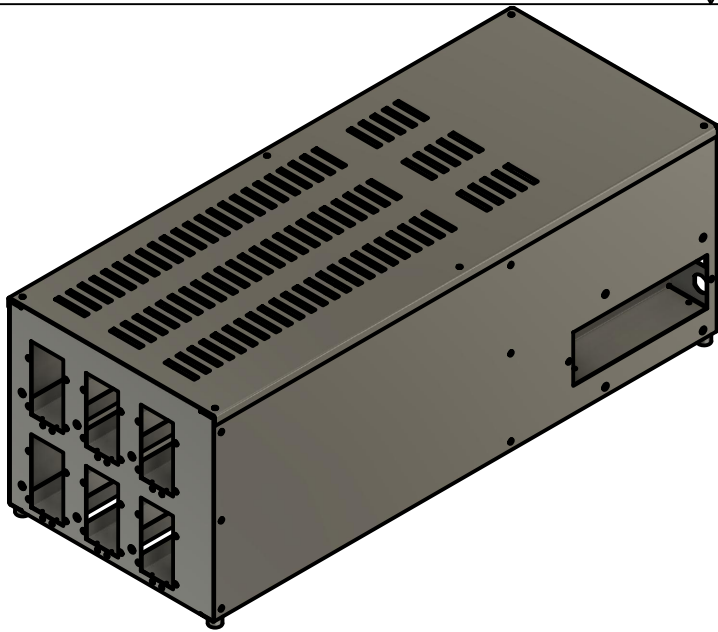

The BP6 2-3 Charging rack is designed for the North American market with a single 120VAC N5-15P plug, requiring a 15 amp dedicated circuit.

The "BP" series of distribution rack is designed to provide a compact shelving system to accommodate PBSC Chargers (PBS01-002019-03) and 36 volt LI-ION Batteries (PBS01-02029-02).

This model is portable and allows you to charge up to 6 batteries at a single station from a single common 120VAC circuit. Each battery is charged by a single PBSC charger mounted in the rear of the unit, all LED charge conditions are indicated on the front panel. The batteries to be charged are inserted into the front portal.


Input: 120VAC, 12.5A 50-60Hz, corded 6ft, (2M) with N5-15P plug.

Circuit breakered (15A) illuminated on/off switch.


Dimensions: 12.2" (310mm) Width
 11" (280mm) Height
 29.65" (754mm) Depth
 Weight: 35Lbs (16 Kg) Empty

For indoor use only in a well ventilated work area. Consult your local requirements for the proper and safe ventilation and charging of LI-ION batteries.

CSAUS Certification pending. ESA field Certification available.

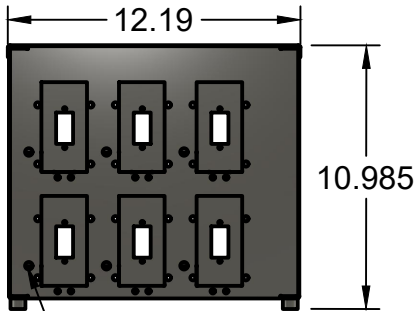

LED Charge Indication

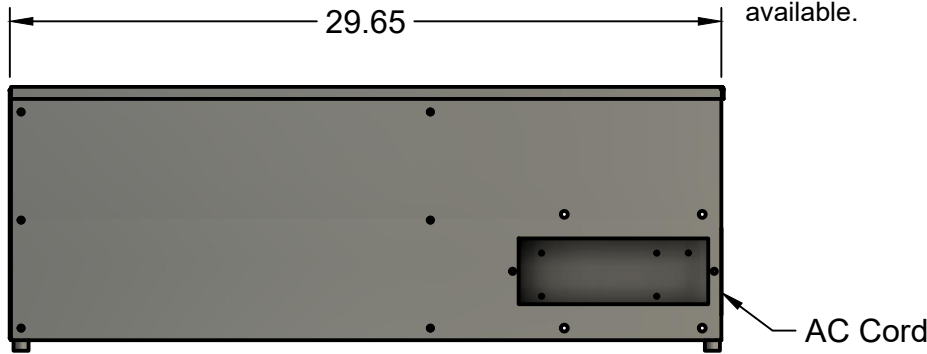

AC Cord

205B Konrad Crescent, Markham, Ontario L3R8T9
 P 905-513-1550, vei@chargers.ca, www.chargers.ca



PROJECT

3.1 BP PBSC CHARGER RACKS

TITLE

BP6 2-3
 North American Voltage

120VAC, 12.5A Input, 50-60Hz, combined.

APPROVED	SIZE	CODE	DWG NO	REV
CHECKED	A			
DRAWN	Simon Plant	2021-12-06	SCALE 1:8	WEIGHT
				SHEET 1/1